



Is your Garage Door  
CE Approved?

New EU regulation  
now in force

**SPECIALIST  
ROLL SHUTTER  
SYSTEMS**  
by Warm Protection Products Limited



## The Compact Automatic Garage Door



**Warm Protection**  
PRODUCTS LIMITED



5 Star Quality & Service



## When space is key, fit the Compact

With the complete package from design to fitting, there really is only one choice

Warm Protection Products Limited now offer the Compact Garage Door. Ideal for single sized garages with limited internal or external headroom. The Compact Garage Door neatly rolls up into housings that start from 205mm (8"). Operated via a Somfy tubular motor complete with a manual override facility and Somfy Rollixxo remote controlled unit with wireless safety edge.

Manufactured from high quality foam filled 54/56mm hard foam aluminium slats with a heavy duty bottom rail, the Compact Garage Door simply slides up and down within its aluminium powder coated brush lined side guides.

Standard features for the Compact Garage Door include a 90° back box on internal fit doors with an optional extra for a 45° front box. On externally fitted doors a full 90° back box and 45° front box is fitted as standard.

The Compact Garage Door is also fitted with an automatic locking system making your door secure when fully lowered. The Compact Garage Door is available in a choice of finishes, which will compliment and enhance your home for many years.

Once installed your Compact Garage Door has a low maintenance requirement and comes complete with a 5 year guarantee on all manufactured parts for total peace of mind and most important of all it is CE compliant to the latest standards and directives.

30

Years of



5 Star Quality & Service



# New designs, new technologies, new ideas

Innovative products made for effortless design

Only the 'Compact' boasts the latest market leading technology. With the ultra modern Somfy Rollixo Remote Control Unit which has internal push buttons and visual LED display function, with wireless safety edge system and built in 105 decibel alarm that activates when an attempt is made to forcibly lift the door.

The complete system is fully compliant to the highest standards of safety and CE approved to the new EU regulations.



## An impressive list of standard features...

- Somfy Rollixo Remote Control Unit with wireless optical safety edge complete with 5 year warranty.
- Somfy manual override motor complete with 5 year warranty.
- Thick reinforced polyamide locking straps.
- Somfy built in alarm function with 105 decibel sounder which is activated if the shutter is forcibly lifted.
- Somfy easy to operate remote control handset with 4 channels and heavy duty key ring holder.
- Prolack thick double painted roll-formed Heroal 54mm profiles with final lacquer finish for extra durability.
- Standard Colours feature a unique 56mm Alugix Hard Foam profile with screw in endlock system and Prolack double painted finish with final lacquer finish.
- Somfy Rollixo integral push button control on remote unit complete with diagnostic LED display.
- Thick extruded aluminium guide rails 68mm wide as standard, complete with brush seals.
- Optional external low level lockable override unit for garages with no other exit.
- Optional anti-vandal wireless keypad.
- Optional full box.



In partnership for 30 years



In partnership for 30 years



• Rollixo RTS Controller



• Optional Wireless Wall Switch



• Optional RTS Wireless Keypad



## Smoothly combining ultramodern wireless technology with eye-catching style

With the complete package from design to fitting, there really is only one choice

Somfy's new Rollixo RTS Control Unit is the latest innovation from the world leader in tubular motors and control equipment. The RTS symbol represents the latest radio technology Somfy brand. Operating from a dedicated frequency of 433.42 MHz and complete with rolling code technology the RTS Somfy Systems are undoubtedly the leaders in their field. The stylish ultra-modern control unit comes complete with 2 handheld key-fobs, up, stop and down buttons, LED diagnostic display system, built-on courtesy light and integral 105 decibel alarm unit. The Rollixo Safety System comprises of a wireless OSE Safety Edge Transmitter which wakes up on initial movement and stays awake until the door stops moving ensuring battery life is protected. The wireless OSE Safety Edge Transmitter powers an Optical Safety Beam through the bottom rail rubber which when activated or compressed stops the door from closing further. Other wireless accessories are available to compliment the system. The Somfy Smoove Wireless Switch can be installed at the back of a garage without the need for wiring. A simple brush with your finger activates the switch to your desired direction. For an external situation the wireless RTS Anti-Vandal Keypad can be installed again without the need for wiring. A must for multiple door users. Simply push in your personal code number on the illuminated keypad and see your door operate.



• Wireless OSE Safety Edge Transmitter




• Somfy remote control handsets  
2x Black supplied as standard  
(coloured buttons available with extra handsets)



# Optional Extras that make it extra special

Bespoke options that make a Compact totally unique



**Additional Handsets** are available with a choice of three colour button combinations of Red, Green and Blue. Ideal for individual identification.



**RTS Wireless Smooove Switch** is a touch sensitive switch which is wireless and can be installed at the rear of the garage allowing you easy operation to activate your door whilst inside your home.



**Full Boxes** are available to totally conceal the roller shutter curtain and increase the thermal efficiency of the door. Constructed from aluminium sheet, powder coated in white or dark brown as standard.



**The Low Level Lockable Override Kit** can be obtained when no other access is available into your garage for emergency manual override or power failures. Simply unlock and remove the key cylinder and insert your winding handle to raise or lower your door until the power comes back on.



**RTS Wireless Anti-Vandal Keypads** are available for multiple users. If you forget your key-fob, simply press in the 4 digit code on the illuminated keypad and see the door operate.



**Laminated Wood Effect Finishes** are available to compliment wood or wood effect UPVC windows and doors. Laminated wood effect solid slats are available at a surcharge in Golden Oak, Rosewood and Mahogany finish. Other wood effect colours are available as a special order, at an extra additional surcharge.

Please Note: Only the convex side of the profile is laminated as standard. Ventilation and vision profiles cannot be laminated. Laminated profiles are produced on dark brown profiles as standard.



# Why is the Compact the best on the market?

Here is a check list of the essential elements that make up the Warm Protection Compact Garage Door



Is your Garage Door CE Approved?

New EU regulation now in force

## Totally Safe System

To comply with the current Health and Safety/Machinery Directives electrically operated doors/shutters should comply with BS EN 13241-1 and all other relevant standards. To comply to the current standards any remote controlled garage door should incorporate a self check safety edge device that activates on impact of obstruction. All 'Compact' doors come as standard with self check Safety Edges ensuring you and your family are safe.


Self check Safety Edges are safety devices fitted to the leading edge/bottom rubber of the 'Compact' curtain. If the 'Compact' hits an obstruction on its descent then the door will stop automatically and return a few inches to take the stress off the obstruction. 'Self Check System' means if the safety edge is damaged or broken the door will only operate by a hold to run process ensuring the door cannot harm anyone on its descent. To comply to the law a door must stop if it hits an obstruction and must be a self check system.

**Remember don't be fooled by cheap imitations, ensure your new door has all these features and meets the new Health & Safety Directives. Even a Single Photocell is not compliant to the new regulations. So, failure to do so may result in fines or imprisonment.**



## Automatic Obstruction Recognition

Instant Obstacle Detection

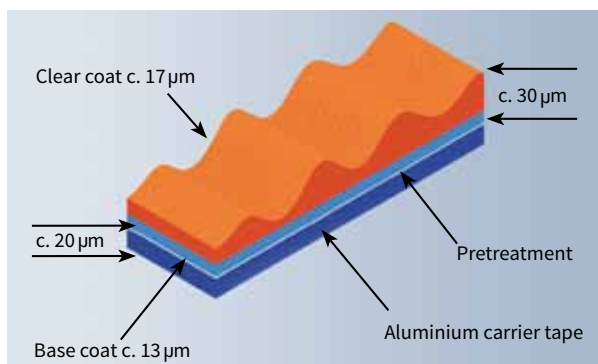

## Prolack Double Coating

The most durable finish available on 'Compact' profiles. All Heroal 54mm profiles have Prolack finish which has two coats of paint then a final lacquer finish to achieve a superior durable finish.

## Optical Safety Edge System CE Approved

Complete safety by self check optical sensors within the bottom rubber of the door profile for instant obstacle recognition on impact.


# Peace of mind comes fitted as standard...



✓ **Locking Strap**  
Thick reinforced polyamide locking system.



✓ **Profile**  
54/56mm aluminium insulated profiles with Prolack double coating and polyurethane foam filling.

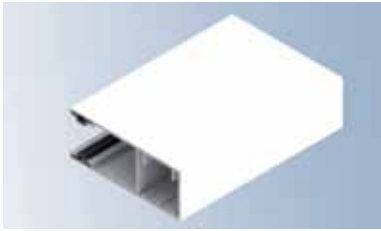

✓ **Guide**  
Thick aluminium extruded brush lined guides for smooth quiet operation, available in white or dark brown as standard.




✓ **Rollixo Control Unit**  
With LED diagnostic display. Internal push buttons. Courtesy light and built in 105 db alarm system.



✓ **Somfy Motor**  
Superior quality Somfy motors.



✓ **Manual Override**  
For emergency manual override or power failures.

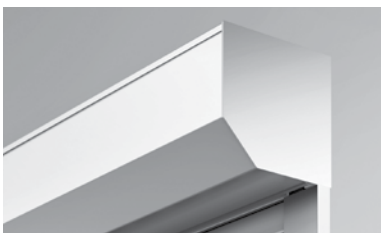


✓ **Compact Full Boxes**  
For external installation or optional extra on internally fitted doors in white or dark brown as standard.



✓ **Somfy Rollixo**  
4 channel keyfob with easy touch button and key ring holder.



✓ **Safety System**  
Somfy Rollixo Wireless Safety Edge with self check optical sensors for instant obstacle detection.

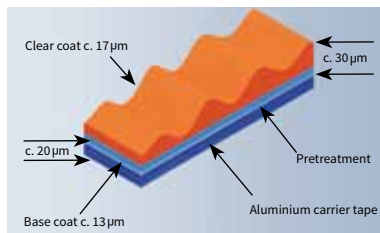

✓ **Prolack Double Coating**  
The most durable finish available on a Compact Garage Door. All Heroal 54/56mm profiles have Prolack finish which has two coats of paint then a final lacquer finish to achieve a superior durable finish.

## Standard Curtain Colours in 56mm Hard Foam Profile

Steel Blue / RAL 5011 / 09

White / RAL 9016 / 19

Cream / RAL 1015 / 23

Moss Green / RAL 6005 / 43

Black / RAL 9005 / 44

Purple Red / RAL 3004 / 47

Jamaica Brown / RAL 8019 / 60

Golden Oak Painted Finish

## Special Order

Agate Grey / RAL 7038 / 18

Silver / RAL 9006 / 20

Brown / similar to RAL 8014 / 22

Dark Beige / BS08B21 / 24

Fir Green / RAL 6009 / 49

Light Beige / BS08B-17 / 32

Daffodil Yellow / RAL 1007 / 46

Anthracite Grey / RAL 7016 / 53

Azure Blue / RAL 5009 / 48

## Stock Laminate Colours

Golden Oak

Rosewood

Mahogany

available at an extra cost



## Warm Protection Products Ltd are fully CE Approved

Warm Protection Products Limited are fully CE approved to BS EN 13241-1. It is illegal to install a power operated garage door in the UK without it complying to the Machinery Directive and Construction Products Regulation. To ensure your door complies both the door, the motor and the control/safety equipment must have a Declaration of Incorporation from the manufacturer ensuring everything is completely tested and certified to the relevant standards complying to BS EN 13241-1. The door should have a label from the manufacturer complying to the tests undertaken to achieve its compliance under the Construction Products Regulation.

On completion of the garage door installation the installer must also provide a Declaration of Conformity and apply a CE label with identification information of the installation which is now classed as a machine.

The installer must issue operating and maintenance instructions and after a demonstration on how to operate the new door the installer will sign the Declaration of Conformity. The installer will ask the customer to also sign the document as proof that he has given a demonstration on how to operate the door. Each party retains copies of the documentation for their records. If any of the above is not fulfilled then the product and the installation is illegal.

## Our 5 Year Guarantee

**GENERAL WARRANTY:** Rolladour, electric operators, spares and accessories are warranted against manufacturing defects for a period of five years from the date of purchase. **ADDITIONAL PERFORMANCE GUARANTEE** The paint finish can be expected to provide weatherproof membrane, i.e. will resist perforation of steel substrate due to corrosion from the weatherside. Any fade of colour change shall be limited and uniform given equal exposure to the local environmental conditions. The guarantee applies to the weatherside of the door curtain only and is subject to the following conditions: 1. The garage door must be free of impact or mechanical damage, scratches, tears, scuffs or other surface abrasions. 2 Surfaces must be freely exposed to washing by rainfall and kept clear of bird droppings, accumulated dirt and debris. 3. The guarantee applies only to the weatherside and where more than 5% of the surface area of any one door is affected. Corrosion, discolouration or other effects arising from elements within the building or from abnormal pollution or contact with aggressive fumes or chemicals are excluded. 4. The guarantee begins at the time of first delivery of the product by Warm Protection Products Limited. 5. This guarantee is valid for doors sold in the UK and RoI only. 6. In the event of a justifiable and agreed claim the company may replace the door or offer a refund at its sole discretion. Any refund will be limited to a maximum value equivalent to the list price of the door applicable at the time of purchase. 7. Small template marks may appear on the inside of the top section of the Rolladour curtain, where the locking straps appear, this is normal and will not interfere or damage the door and is void from guarantee. 8. Wearing of the Rolladour curtain may appear and be visible when the Rolladour curtain is fully open. This wear is due to the lead in of the curtain in the guide tracks. The wearing is common and will not result in a defect of the shutter door. The wearing down of the paint to the aluminium will not result in further damage and is seen as general wear and tear. This wear and tear is hidden within the guide tracks when the Rolladour is fully lowered. This wear and tear will not be taken as a fault on the door and the Rolladour curtains will not be replaced if these marks appear. All other parts of the door are guaranteed against manufacturing defects for a period of five years from date of purchase. 9. The five year warranty is dependant on an annual service inspection and maintenance of the roller door by an authorised Warm Protection Agent. Proof of service must be recorded in the Operation and Maintenance Manual supplied with the door. Failure to carry out an annual service with recorded proof will invalidate the warranty. 10. The rubber profile at the bottom of the door curtain concealing the optical safety system must be installed onto a level surface to function correctly. If floor levels are irregular, the floor must be levelled or the door stopped at a level point, to ensure the rubber profile concealing the optical beam is not crushed. This may create an air gap under the door which cannot be rectified, unless the floor is levelled. **PLEASE NOTE:** In line with Warm Protection Products Limited's policy of continuous product improvement, we reserve the right to make changes without prior notification. Whilst every effort has been made to provide an accurate representation, colours shown in this brochure are for illustrative purposes only and may vary from the product received.



5 Star Quality & Service



**somfy**  
In partnership for 30 years



In partnership for 30 years